

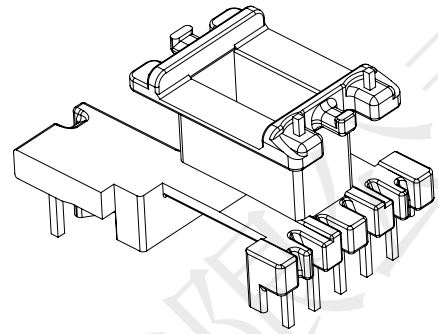
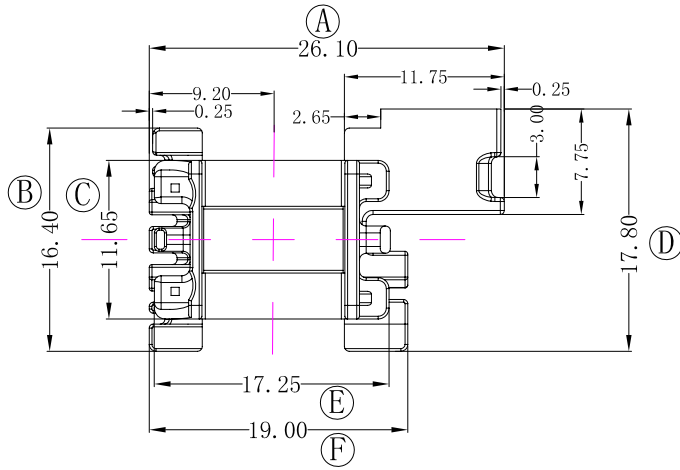
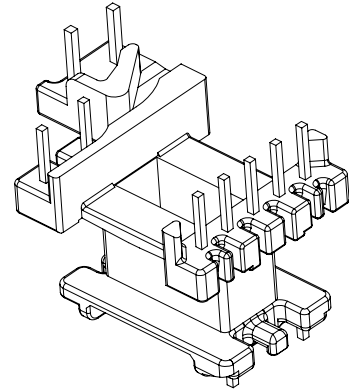
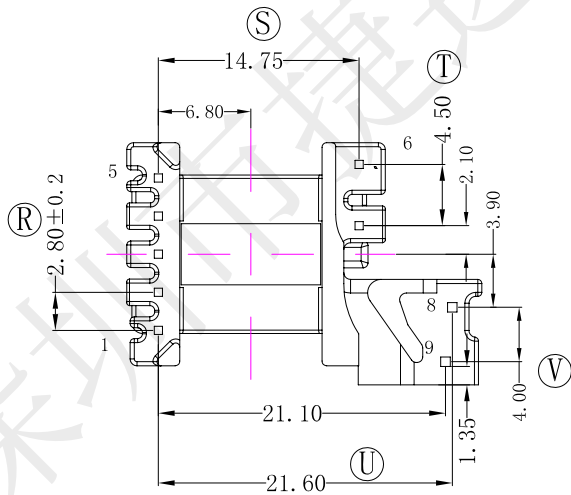
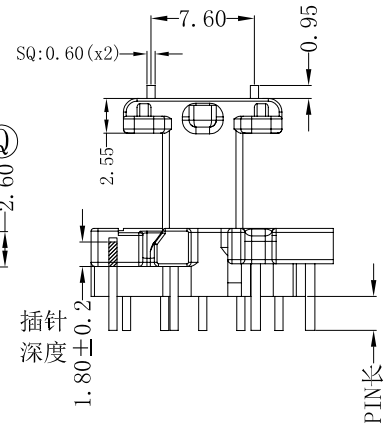


型号

EE-1665

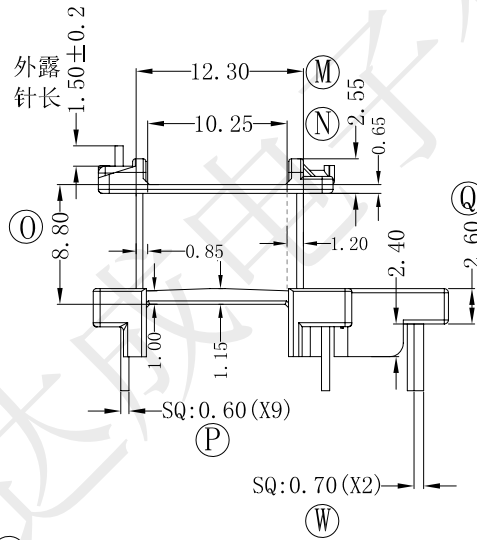

SI/S2插针深度  
1.3±0.2, 拉拔力焊  
前≥1.0KG, 焊后≥  
1.2KG

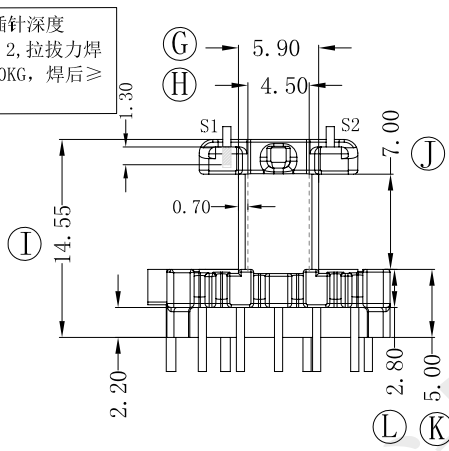


| REV | DATE | REVISIONS | REC |
|-----|------|-----------|-----|
|     |      |           |     |
|     |      |           |     |
|     |      |           |     |
|     |      |           |     |

深圳市捷达成电子有限公司

SHANZHEN JIEDACHENG ELECTRONICS CO.,LTD.

TEL:0755-27317730 FAX:0755-27317731

ANGLE:  
+/-1°UNIT:  
MMSCALE:  
4/1

MODEL NAME:

EE-1665 5+4+2PIN

UL REC:

UL 94V-0

PIN TENSION LOAD:

2.0KG MIN

DATE:

2023-06-08

BOBBIN MATERIAL:

PHENOLIC

PIN MATERIAL:

CP WIRE

DRAWING NO:

EE-16

REV:

1.1

DRAFTER

L.R.J

TOLERANCE

0&lt;L&lt;4 ±0.1

4&lt;L&lt;16 ±0.2

16&lt;L&lt;50 ±0.3

PIN PITCH ±0.2

CHECKER

Y.F.